THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

## NOTES:

<u>1/2"</u> 12.7mm

LUG-

<u>1/2"</u> 12.7mm

SINK

DO NOT CUT HOLES IN COUNTER TOP UNTIL SINK IS AT HAND. SINKS HANG INSIDE COUNTER-TOP CUTOUT; THEY DO NOT OVERLAP EDGE. IN MARKING CUTOUT ON COUNTER, THE MOUNTING RIM IS USED AS THE TEMPLATE, NOT THE SINK. RIM MUST FIT LOOSELY IN THE HOLE, OVERLAPPING BOTH COUNTER AND SINK (SEE VIEW A). CUTOUT SHOULD BE 3/8" (9.5mm) LARGER THAN SINK, ALLOWING A MINIMUM CLEARANCE OF 1/16" (1.6mm) ALL AROUND.


CAUTION: VERTICAL PARTITIONS UNDER SINK MUST BE AT LEAST 2" (51mm)AWAY FROM SINK CUTOUT TO ALLOW FOR INSTALLA-TION OF LUGS TO THE MOUNTING RIM.

<u>1/4"</u> 6.4mm

RIM

51mm MINIMUM

> VIEW A **SCALE: 1/1**

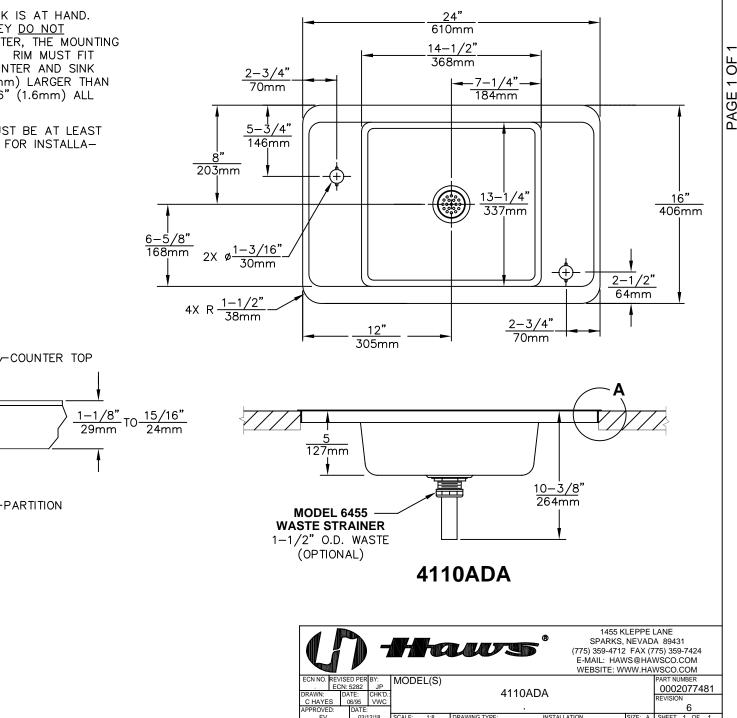

DATE: 03/12/18

6

EET 1 OF 1

©2018 Haws Corporation - All Rights Reserved. HAWS<sup>®</sup> and other trademarks used in these materials are the exclusive property of Haws Corporation.