

Model 5235 Essence 4272

Swirl-way® Oval MicroDerm™ Therapeutic Bath



MicroDerm™ Therapeutic Bath Features

- 71-1/2" x 41-1/2" x 24" oval bathtub
- MicroDerm™ microbubble technology
- Sculpted armrests and lumbar backrest
- Two pillows
- Mansfield® Limited Ten Year Warranty
- Available in standard colors (white, bone, biscuit and almond) and premium colors* (British khaki, black and ice gray)

*additional charge will apply





Model 5235

Options

Cable Drain

Lift and Turn Drain

| Model # | Description | | Model # | Description | |
|---------|-------------------|---|---------|-------------------|---|
| SW1319 | Standard Colors |  | PF1320 | Polished Chrome |  |
| SW1320 | Polished Chrome | | PF1321 | Everbrass (PVD) | |
| SW1321 | Everbrass (PVD) | | PF1322 | Brushed Nickel | |
| SW1322 | Brushed Nickel | | PF1323 | Oil Rubbed Bronze | |
| SW1323 | Oil Rubbed Bronze | | | SWA100 | Rainbow Pillow |

Trim

| Model # | Description |
|---------|---|
| - | Color-match trim included for standard colors |
| MD1335 | Polished Chrome (for premium colors) |



MADE IN USA

Model 5235 Essence 4272

Swirl-way® Oval MicroDerm™ Therapeutic Bath




Specifications


| Model # | Description |
|---------|------------------------------|
| 5235 | 71-1/2" x 41-1/2" x 24" Oval |

| Specification | Description | Specification | Description |
|-------------------------|--|----------------------|--|
| Material | Acrylic, fiberglass reinforced | Number of Jets | 2 |
| Construction | Self-contained, pre-plumbed bath system, mounted on a pre-leveled base | Water Capacity | 70 gal. (min.) 95 gal. (max.) |
| Pump Motor | 120V, 10 Amp, 60 Hz Thermally protected | Floor Loading Weight | 47 lbs. / sq. ft. (229 kg /m ²) |
| Electrical Requirements | 120V, 20 Amp, GFCI protected circuits | Shipping Weight | 190 lbs. |
| On/Off Control | Single Button electronic control, 20-minute time cycle | Warranty | Limited Ten Year |

Technical Information

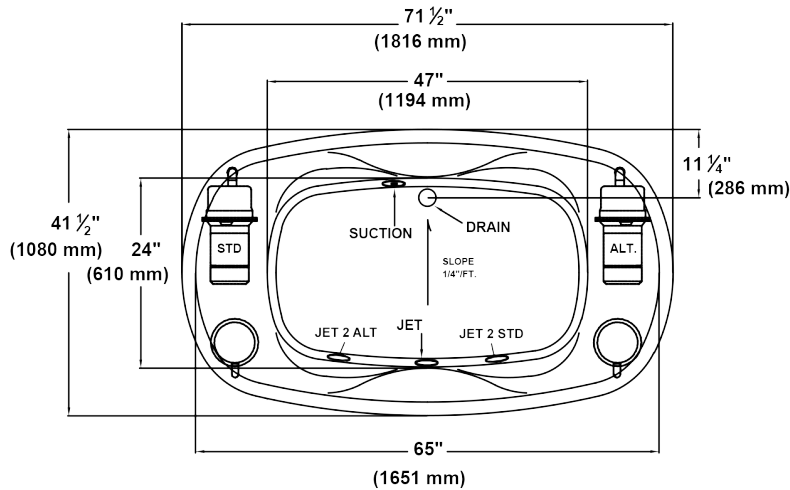


Pump locations shown for clarity.
STD - Standard location ALT - Alternate location

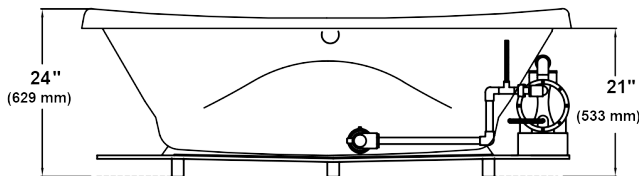


Rough-in measurements may vary 1/4" (+/-)

NO APRON AVAILABLE ON THIS MODEL



PLUMBING ROUGH-IN

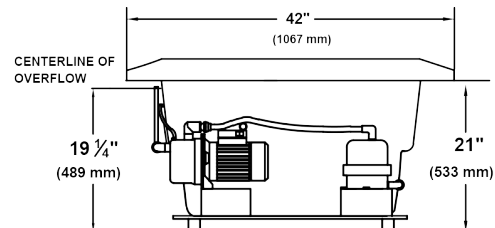

Installer Note: Due to the freeform shape of this tub, it is recommended that the tub be on the jobsite before making the final cut out for drop-in installation.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent connection only.



MADE IN USA