# **MOEN**<sup>®</sup>

#### **DESCRIPTION**

- · Versatile, hands-free convenience in the kitchen
- Optimized cleaning force with PowerClean™
- Allows users to control the faucet in 2 unique ways: Wave Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing
- Reflex<sup>™</sup> pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- · Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- Quick connect installation Duralock™
- · Faucet designed for handle to be mounted on right side

## **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

### **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**

1255™ Duralast™ cartridge for Single-Handle Faucets

### **STANDARDS**


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- · Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- 🔻 ADA 🖶 for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

# **Specifications**



Arbor™ MotionSense Wave™
Single Handle High Arc
Pulldown Kitchen Faucet

Models: 7594EW series


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



See page 2 for dimensions

# **MOEN**<sup>®</sup>

# **Specifications**

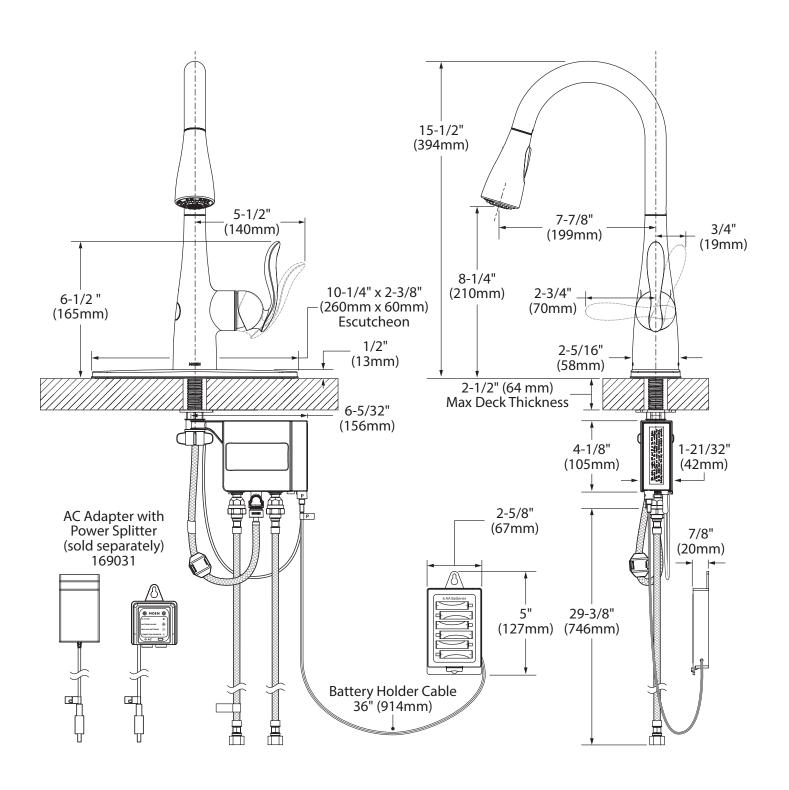

# **CRITICAL DIMENSIONS**

(DO NOT SCALE)