



Buy it for looks. Buy it for life.®

# Specifications


## DESCRIPTION

- Metal construction with various finishes identified by suffix

## OPERATION


- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^\circ\text{F}$  ( $\pm 2^\circ\text{C}$ )

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1
- **ADA**  for lever handles

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




## KINGSLEY™ MOENTROL® with Built-In 3 Function Transfer Valve Trim

**Models:** T4111 series

**Valves:** 3330 (1/2" CC)  
3320 (1/2" IPS inlets/CC outlets)

3350 (1/2" CC, 2 Function transfer valve)

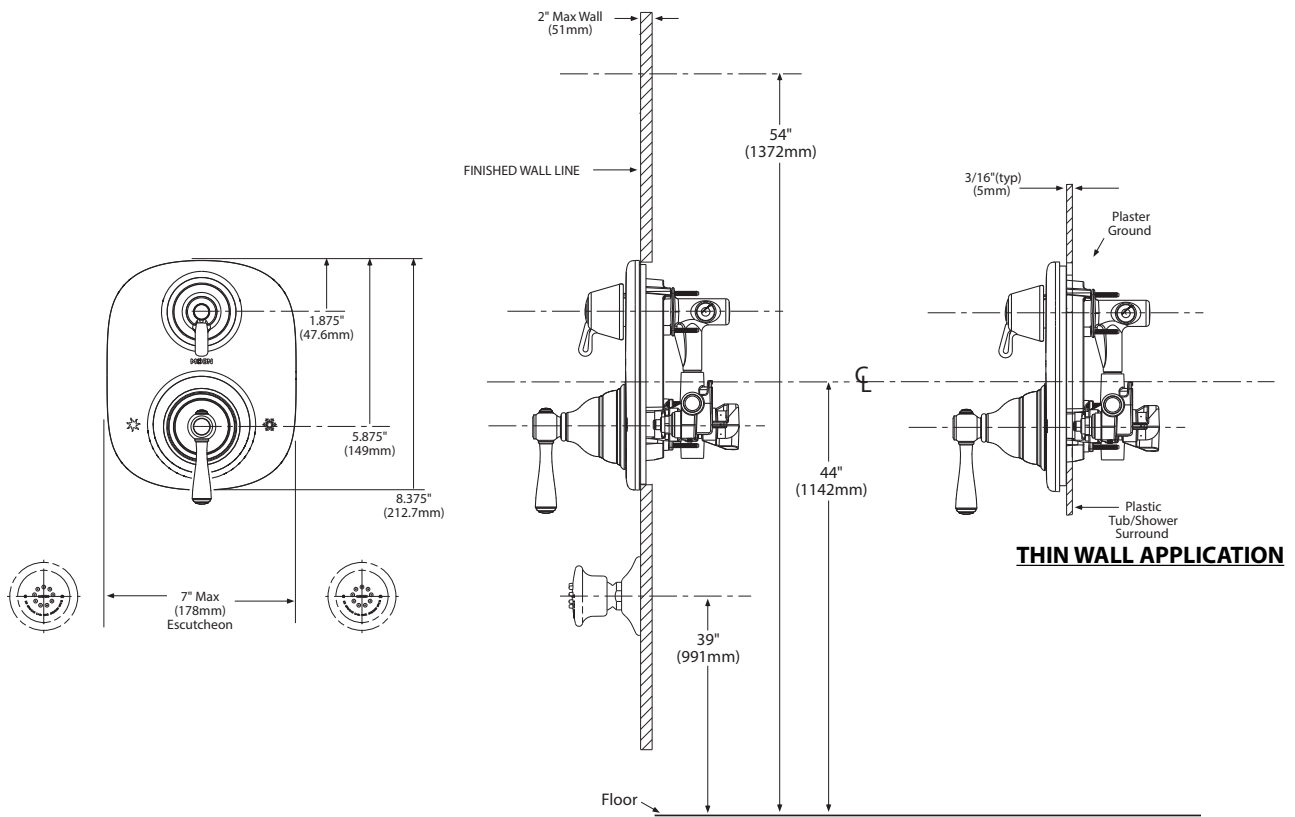

## CRITICAL DIMENSIONS

(DO NOT SCALE)