

Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28 GPF

FEATURES

- Wall-mounted
- Elongated front bowl
- Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating
- Designed for reclaimed water use

MODELS

- CT708UX
Commercial wall-mounted toilet with 1-1/2" top spud inlet, less seat
- CT708UGX
Commercial wall-mounted toilet with 1-1/2" top spud inlet, less seat with CEFIONTECT ceramic glaze

ADDITIONAL ITEMS

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

EcoPower® Flush Valves	
Exposed	
TET1UAX32#CP	1.0 GPF
TET1LAX32#CP	1.28 GPF



Flush valve sold separately



COLORS/FINISHES

- Standard
#01 Cotton

PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0 or 1.28 GPF (3.8 or 4.8 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708U(G)X_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



CT708U(G)X

Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0/1.28 GPF

SPECIFICATIONS

Water Use	1.0/1.28 GPF (3.8/4.8 LPF)
Flush System	Siphon Jet Flushing Action
Water Surface	12" x 9-1/4"
Water Pressure	Min: 35 psi (Flowing) Max: 80 psi (Static)
Min. Flow Rate	24 GPM
Trap Diameter	2-1/8"
Trap Seal	2-5/8"
Material	Vitreous China
Warranty	One Year Limited Warranty
Shipping Weight	56 lbs
Shipping Dimensions	26-1/4" L x 15-5/8" W x 16" H


INSTALLATION NOTES

RECLAIMED WATER QUALITY PARAMETERS	
Chloride Ion Concentration	< 600mg/L
pH	5.8~8.6
Free Carbonate	< 50mg/L
Langelier's Index	> -3.00
Nitrate Ion Concentration	< 60mg/L
Conductivity	< 250mS/m
Sulfate Ion Concentration	< 100mg/L
Residual Chlorine Concentration	< 2mg/L
Hydrogen Sulfide Gas	None Existence
Suspended Solids	< 5mg/L

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073RX.

TOTO Reclaimed Water flush valves are designed to perform best when used with TOTO Reclaimed Water urinals/toilets and components. Although TOTO Reclaimed Water products may be used in combination with other reclaimed water product brands, optimal performance might be impaired and attempted use with any non-compliant reclaimed water product(s) could result in corrosion, leakage or void the warranty.

DIMENSIONS

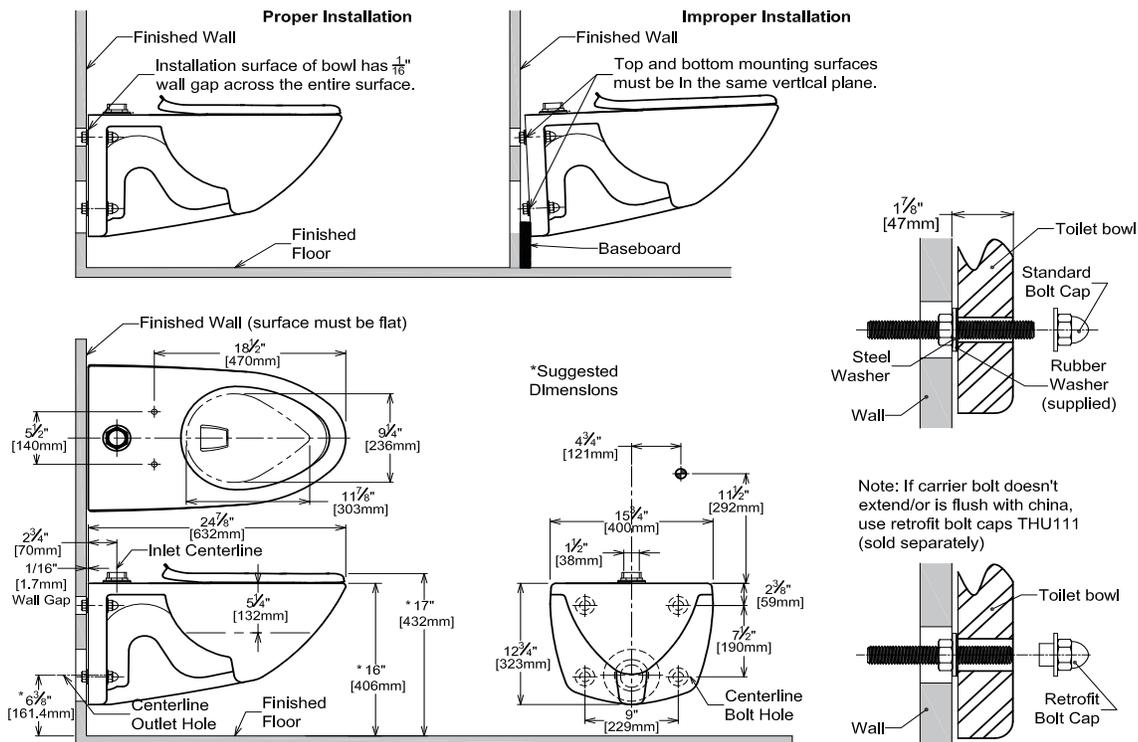

TOTO

These dimensions and specifications are subject to change without notice